

Description

With double layer chain conveyor empty pallets are supplied on the bottom level and full pallets are discharged on the upper level. Easy and fast load/unload function for high output productions.

Application


Boxes that can be top picked with a **vacuum** gripper.

Optional Equipment

- ✓ Mechanical or electrical gripper
- ✓ Parametric programming
- ✓ Energy Saver

Key Advantages

- ✓ User-Friendly
- ✓ Cost-Effective
- ✓ Advanced Reliability
- ✓ Small Footprint
- ✓ Quick Start-up Cycles
- ✓ Low Maintenance

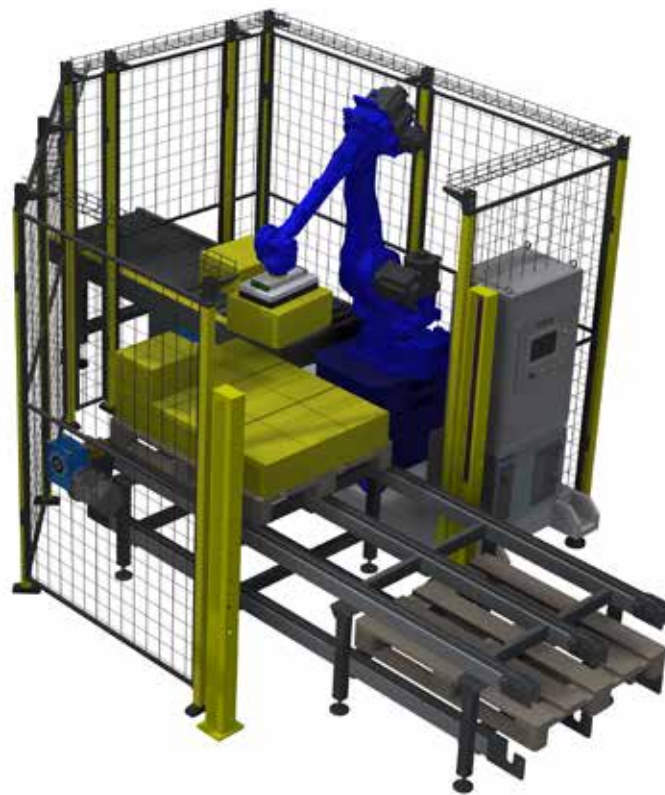

Continuous Operation	Yes
Cell dimensions	4900 x 3200 x 2500 mm
Max. Case Weight	Up to 50 kg
Max. Productivity	Up to 10 CPM
Gripper	Flexible vacuum gripper
Max. Pallet Height	1800 mm
Safety Guarding	According to category IV of EN ISO 13849

Pallet size:

- 1200 x 1000 mm (UK)
- 1200 x 800 mm (Euro pallet)